



**FIRE
APPARATUS
MANUFACTURERS'
ASSOCIATION**

FAMA Safety Signs

TC010

Issued
Revised

December 3, 2012
January 3, 2023

Standard Product Safety Sign Catalog for Automotive Fire Apparatus

RATIONALE

This document gives the fire apparatus manufacturers an option to provide standardized product safety sign text and artwork for common hazards.

FOREWORD

This document presents safety signs for potential use on fire and rescue apparatus.

TABLE OF CONTENTS

1	SCOPE	1
2	REFERENCES	1
3	DEFINITIONS	2
4	GENERAL	2
5	NFPA APPARATUS STANDARD COMPLIANCE	3
6	SAFETY SIGN TEXT AND ARTWORK	4

1 SCOPE

This document presents a standardized catalog of safety sign text and artwork that may be used by any apparatus manufacturer to warn of common hazards. It remains the product manufacturers' obligation to furnish adequate warnings and instructions, after consideration of the products specific characteristics and environment of use. A manufacturer may elect to use any of the standardized signs, text and/or artwork contained in this catalog, but no manufacture is required to do so.

2 REFERENCES

2.1 Applicable Publications

The following publications form a part of this specification to the extent specified herein.

2.1.1 ISO Publications

Available from ANSI, 25 West 43rd Street, New York, NY 10036-8002, Tel: 212-642-4900, www.ansi.org.

ISO 9244 Earth-moving machinery – Machine safety labels – General Principles

ISO 7010 Graphical symbols – Safety colours and safety signs – Registered safety signs

2.1.2 Other Publications

ANSI Z535.4 American National Standard for Product Safety Signs and labels

ANSI Z535.6 American National Standard for Product Safety Information in Product Manuals, instructions, and Other Collateral Materials

NFPA 1901 Standard for Automotive Fire Apparatus

NFPA 1906 Standard for Wildland Fire Apparatus

3 DEFINITIONS

3.1 Product Safety Sign

Sign, label, or decal affixed to a product that provides essential information concerning a potential hazard, the degree or level of hazard seriousness, the probable consequence of involvement with the hazard, and how the hazard can be avoided.

4 GENERAL

- 4.1 New proposals for product safety sign ideas should be forwarded to FAMA. The FAMA Product Safety Sign group will consider new ideas at each FAMA technical committee meeting and may add new text and artwork to this catalog as appropriate.
- 4.2 The product safety signs shown in this document are intended as examples for sufficiency of text and graphic size with respect to each hazard, however it is the product manufacturer's responsibility to determine the adequacy of warnings and/or instructions that are provided with the product.
- 4.3 Limitations inherent in some reproduction and display technologies may require increased line thickness or other minor modifications of symbols. Such modifications are acceptable provided the symbol is unchanged in its basic graphical elements and remains easily discernible by the operator.
- 4.4 To improve the appearance and perceptibility of a safety sign, or to coordinate with the design of the equipment to which the sign is applied, it may be necessary to change the line thickness or round the corners of a symbol. The graphic designer is free to make such changes, provided that the essential perceptual characteristics of the symbol are maintained.
- 4.5 Some of the product safety signs included in this document are provided with "textless" two-panel versions developed using the guidelines found in ISO 7010. Where appropriate, these versions could be used in place of the ANSI Z535.4 signs at the option of the manufacturer.
- 4.6 Symbols on controls and displays should have good contrast to their background. Pictorials may use either a light symbol on a dark background or a dark symbol on a light background at the manufacturer's discretion. When a pictorial image is reversed (for example, from black-on-white to white-on-black and vice versa), it should be done for the entire pictorial.
- 4.7 Where used, product safety signs should be located as close as practical to the location of the hazard addressed. Some recommendations regarding sign placement are included in this catalog.
- 4.8 Reference numbers are provided as a convenience to the organization of this document and need not appear on the final product.
- 4.9 Product safety sign graphic thumbnails are provided in this document. Full scale artwork can be downloaded from the FAMA website at www.FAMA.org.
- 4.10 All standard ISO version signs are 6.65 in. tall by 3.35 in. wide.
- 4.11 Font sizes are based on using Microsoft Sans Serif.
- 4.12 Colors may conform to the following specification chart Color









	Pantone©	Process Color				sRGB			HTML Code
		C	M	Y	K	R	G	B	
Blue	2945C	100	52	2	12	0	84	159	00549F
Green	3415C	100	5	72	24	0	122	77	007A4D
Orange	152C	0	62	100	0	225	112	0	E17000
Red	485C	0	93	95	0	213	43	30	D52B1E
White		0	0	0	0	255	255	255	FFFFFF
Yellow	109C	0	10	100	0	254	209	0	FED100

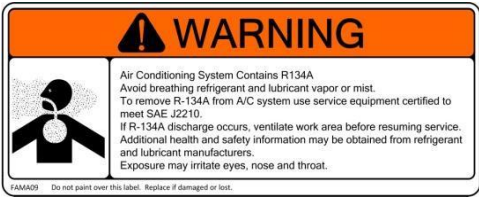







5 NFPA APPARATUS STANDARD COMPLIANCE

- 5.1 Those FAMA safety signs that are required by the 2024 edition of NFPA 1900 *Standard for Aircraft Rescue and Firefighting Vehicles, Automotive Fire Apparatus, Wildland Fire Apparatus, and Automotive Ambulances* are indicated by (NFPA) symbol below the reference number.

6 SAFETY SIGN TEXT AND ARTWORK









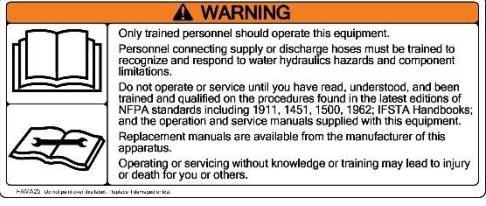

Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA01	Battery Explosion	Visible to personnel near batteries.	3.0 x 4.0	12		
FAMA02	Rotating Shafts	One sign each side of vehicle on the frame rail, and any other place where rotating shaft hazard is apparent.	3.0 x 4.0	14		
FAMA03	Hot Surface	Near hot surfaces	2.0 x 5.0	18		
FAMA04	Hot Exhaust - Horizontal Muffler	Visible to personnel approaching the hot exhaust parts.	3.5 x 3.5	14		









Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA05	Spinning Fan	Visible to personnel at each approach to spinning fans.	3.0 x 4.0	14		 FAMA05G
FAMA06 (NFPA)	Seats Without Belts Not Occupied	Visible to each occupant where seating positions without seat belts are present.	2.0 x 3.0	14		 FAMA06G
FAMA07 (NFPA)	Seated and Belted	Visible to any occupant.	2.0 x 3.0	9		 FAMA07G
FAMA08	Swivel Seat Unsecured	Visible to occupant of swivel seat.	1.9 x 3.1	10		 FAMA08G

Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA09	Air Conditioning Refrigerant	On or near air conditioning unit where mechanic would be apt to find it.	2.0 x 5.0	10		 FAMA09G
FAMA10 (NFPA)	Cab Equipment Mounting	Visible to operator inside the cab.	2.0 x 3.0	8		 FAMA10G
FAMA11	SCBA Seat Insert	Visible to operator inside the cab.	2.0 x 3.0	8		 FAMA11G
FAMA12 (NFPA)	Fire Service Tire Rating	Visible to operator inside the cab.	2.0 x 3.0	8		 FAMA12G

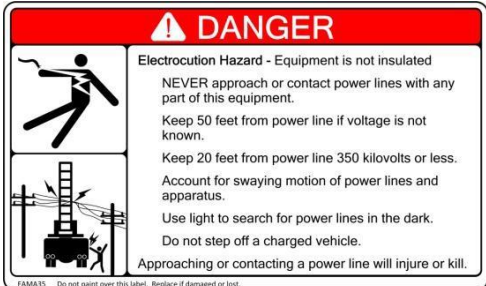

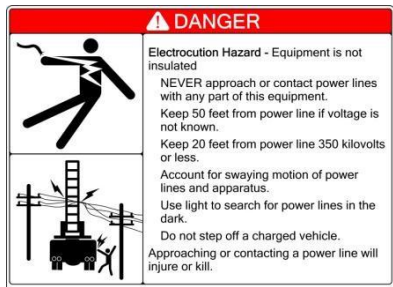





Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA13	Electronic Stability Control	Visible to operator inside the cab.	2.0 x 3.0	10		 FAMA13G
FAMA14	Cab Seating	Visible to operator inside the cab. Fill in blank with number of belted seating positions.	2.0 x 3.0	14		 FAMA14G
FAMA15 (NFPA)	Helmet Worn in Cab	Visible from each seating location	2.0 x 3.0	10		 FAMA15G
FAMA16	Deployable Steps	Visible at step locations.	2.0 x 3.0	14		 FAMA16G

Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA17 (NFPA)	Vehicle Backing	Visible to the driver while sitting in the driver seat.	2.0 x 3.0	9		 FAMA17G
FAMA18	Intake and Discharge Cap Pressure	One sign on each side and back of vehicle where caps are present.	3.5 x 3.5	12		 FAMA18G
FAMA19	Foam Type Mixing	Near Foam Controls	1.9 x 3.1	8		 FAMA19G
FAMA20 (NFPA)	Ultra High Pressure Water	Visible to a person in front of the turret. Visible to turret operator. Visible to fire fighter preparing to use any hand line.	2.1 x 5.2	10		 FAMA20G







Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA21	Rotating or Swinging Parts	One sign near each crush point.	3.0 x 5.0	18		 FAMA21G
FAMA22 (NFPA)	Hose Restraint Required	Near each hose storage area	1.9 x 3.1	10		 FAMA22G
FAMA23 (NFPA)	Access Step Method - Small	Visible to personnel preparing to climb onto or enter vehicle.	3.5 x 3.5	10		 FAMA23G
FAMA24 (NFPA)	Riding on exterior	On the vehicle at the rear step areas and at any cross walkways"	3.5 x 3.5	16		 FAMA24G
FAMA25 (NFPA)	Trained Personnel Only - NFPA Required	Visible at pump operator's station and Aerial operator's platform. For apparatus without a pump or aerial device, locate this sign in a prominent location visible to operating personnel.	2.7 x 6.6	10		 FAMA25G

Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA26	No-Step	On any horizontal surface that would be tempting to step on but that is not provided with slip resistant surface and grab handles.	3.5 x 3.5	12		 FAMA26G
FAMA27	Breaker Box Warning	Visible to personnel accessing electrical panel.	1.9 x 3.1	8		 FAMA27G
FAMA28 (NFPA)	Rope Tie-Down 9000	Near each rope anchor	1.9 x 3.1	8		 FAMA28G
FAMA29	Hydraulic High Pressure Leaks	One label per vehicle in a conspicuous area near the majority of the hydraulic lines or components.	3.0 x 5.0	10		 FAMA29G









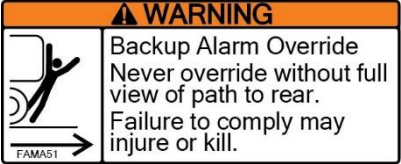
Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA30 (NFPA)	Stabilizer Crush	Visible to person standing near each stabilizer Visible to stabilizer deployment operator.	3.5 x 3.5	12		 FAMA30G
FAMA31 (NFPA)	Stabilizer Pins & Pads	Visible to stabilizer deployment operator.	3.0 x 5.0	14		 FAMA31G
FAMA32 (NFPA)	Stabilizer Pads	Visible to stabilizer deployment operator.	3.0 x 5.0	14		 FAMA32G
FAMA33	Stabilizers Not extended	Visible to stabilizer deployment operator.	0.9 x 2.1	10		 FAMA33G
FAMA34 (NFPA)	Fall Restraint Required.	One sign near base of ladder. One sign visible in platform.	3.0 x 5.0	18		 FAMA34G

Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA35 (NFPA)	Aerial Electrocutation Small Size	Visible to aerial and pump operator.	3.0 x 5.0	10		 FAMA35G
FAMA36 (NFPA)	Aerial Electrocutation Large Size	Visible to personnel on aerial apparatus approaching vehicle from either side and back.	6.0 x 8.0	18		 FAMA35G
FAMA37 (NFPA)	Aerial Device Load Capacity	Visible to aerial operator at turntable, in the platform, and at tip controls.	3.0 x 5.0	12		 FAMA37G
FAMA38 (NFPA)	Aerial Ladder Rung Pinch	One sign visible to personnel operating tip controls. One sign visible to Aerial Operator.	1.9 x 3.1	10		 FAMA38G

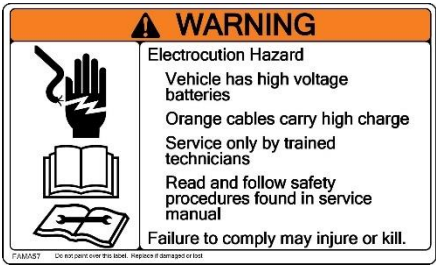

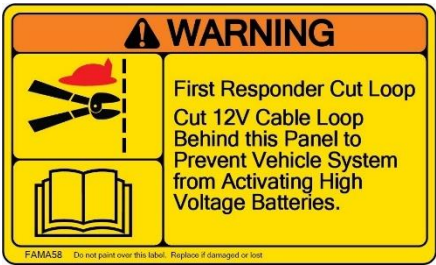

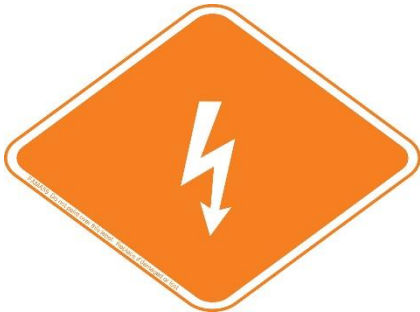
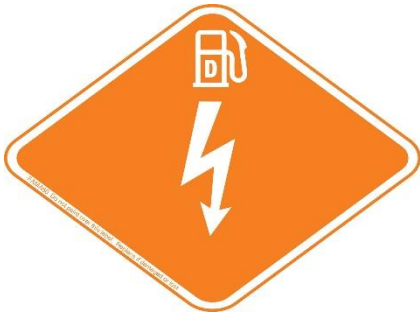

Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA39 (NFPA)	Aerial Inspection	Visible to operator at turntable.	2.0 x 3.0	10		 FAMA39G
FAMA40	Fall Protection Anchor	Next to fall protection anchor.	1.0 x 2.0			 FAMA40G
FAMA41 (NFPA)	Cab Tilt	Inside of driver cab door	2.0 x 3.0	10		 FAMA41G
FAMA42 (NFPA)	Siren Noise	Inside of driver cab door	2.0 x 3.0	9		 FAMA42G
FAMA43 (NFPA)	Helmet Worn in Cab	Visible from each seating location	2.0 x 3.0	10		 FAMA15G

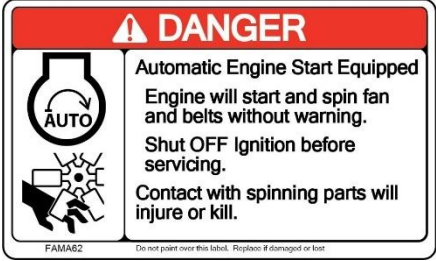

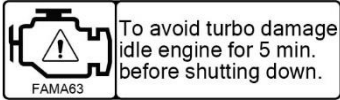
Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA44	Pump and Roll Fire Fighting Position - Exterior	One sign visible from the pump-and-roll firefighting position	3.5 x 3.5	14		
FAMA45	Pump and Roll Fire Fighting Position - Driver	One sign visible from the drivers position or visible to the driver while entering the cab	2.0 x 3.0	10		
FAMA46 (NFPA)	Aerial Device Pinch	One sign on aerial device visible to personnel on the turntable at the foot of the device	1.9 x 3.1	10		

FAMA46G

Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA47 (NFPA)	Aerial Device Operator Attention Required	Visible to aerial operator at turntable, in the platform, and at tip controls	3.0 x 5.0	12		 FAMA47G
FAMA48	Designated Standing and Walking Surfaces	One sign visible to personnel preparing to climb onto or enter vehicle.	2.1 x 5.2	11		 FAMA26G
FAMA49	Ladder or Equipment Rack	Visible to operator of the ladder or equipment rack.	1.9 x 3.1	11		 FAMA49G
FAMA50	Ladder or Equipment Rack Restraints	Visible to operator of the ladder or equipment rack.	1.9 x 3.1	11		 FAMA50G
FAMA51	Backup Alarm Override	Near the override switch.	0.9 x 2.1	9		None

Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA52	Fall	One sign located on the bumper deck or cab front visible to a person preparing to mount the front bumper.	1.9 x 3.1	12		 FAMA52G
FAMA53	Pump Pressure Burst	One sign located near the pump controls.	1.9 x 3.1			
FAMA54	California Regulations	One sign located near the apparatus driver location.	1.9 x 3.1			None
FAMA55	Pump Pressure Burst	One sign located near the pump controls.	1.9 x 3.1			
FAMA56	Pulley and Cable Pinch Hazard	One sign located cable or sheave hazards	1.9 x 3.1			

Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA57	Electric Fire Truck Electrocution Hazard	Near the charging socket	3.0 x 5.0	14		 FAMA57G
FAMA58 (NFPA)	First Responder Loop	On the access door with the first responder loop behind it.	1.9 x 3.1	11		 FAMA58G
FAMA59	Propulsion Energy Identification Electric ISO 17840-4	Each side of cab and rear of vehicle	4.2 x 5.7			
FAMA60	Propulsion Energy Identification Hybrid Electric ISO 17840-4	Each side of cab and rear of vehicle	4.2 x 5.7			
FAMA61	Propulsion Energy Identification Diesel ISO 17840-4	Each side of cab and rear of vehicle	4.2 x 5.7			

Ref Number	Hazard	Location	Size (in.)	Font Size	ANSI Version	ISO Version
FAMA62	Auto Starting Engine Feature	Visible to Driver	1.9 x 3.1	14		 FAMA62G
FAMA63	Turbocharger Damage	Visible to Driver	0.5 x 1.75	8		
FAMA64						
FAMA65						
FAMA66						

7 REVISIONS

Date	Safety Sign	Description of Change
09/19/2013	FAMA30	Changed term from “jacks” to “stabilizers”. Added second pictograph panel for staying away from hazard. Changes made at the request of NFPA 1901/1906 Aerial Task Group.
09/19/2013	FAMA39	...daily, frequent, and annual inspections <u>and maintenance</u> . Change made at the request of NFPA 1901/1906 Aerial Task Group.
02/11/2014	FAMA13	Changed the graphics for consistency with W09 and J14 from SAE J2402. Increased font size from 8 to 10.
02/11/2014	FAMA16	Added deployable step symbol 2572 from ISO 7000. Increased font size from 12 to 14.
02/11/2014	FAMA40	Revised the image of the hook to be consistent with typical safety harness hooks.
02/11/2014	ISO Symbols	Added ISO text-free safety signs FAMA04G, FAMA06G, FAMA08G, FAMA09G, FAMA10G, FAMA11G, FAMA12G, FAMA13G, FAMA14G, FAMA16G, FAMA17G, FAMA19G, FAMA20G, FAMA21G, FAMA28G, FAMA36G, FAMA39G, FAMA40G, FAMA41G, and FAMA42G.
10/03/2014	FAMA44, 45	New NFPA 1906 Pump and Roll Fire Fighting Position signs.
10/03/2014	FAMA46	New pinch and crush warning sign for aerial device turntable position.
10/03/2014	FAMA47	New aerial primary operator attention required warning
04/07/2016	FAMA25	Added reference to NFPA 1962
04/07/2016	Table	Updated text and table to reflect changes due to the 2016 editions of NFPA 1901 and 1906
05/30/2017	FAMA 48, 49, 50	New signs added.
05/30/2017	Color Chart	Added standard colors chart in paragraph 4.12 for reference
04/17/2019	FAMA51, 52	New signs added.
10/17/2019	FAMA53 - 55	New signs added.
02/01/2022	FAMA56-63	New Signs added
01/03/2023	ALL	Updated to indicate which safety signs are required by the 2024 edition of NFPA 1900